

EXECUTIVE™ G2FI 350



5075
PSI

25
L/PM

HONDA iGX800
EFI PETROL
ENGINE TYPE
POWERED by HONDA.

GEARBOX
1450RPM
DRIVE

HOT
WATER
OUTPUT



HERO INNOVATIONS

ETL™
Engineered Top Lifting Lugs

PEXO™
Stainless Steel Exoskeleton

JWPP™
Jetwave Italian Premium Pump


CC™
Centralised Control

AST™
Auto Speed Technology

CLASS B AS/NZS 4233.1
PRESSURE CLEANER
PRO CERTIFICATION IS REQUIRED FOR OPERATORS

APPLICATIONS

- Tradesmen
- Commercial Cleaners
- Shipping & Marine
- Offshore Oil & Gas

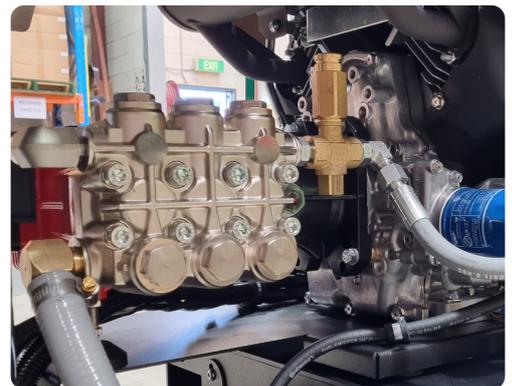

STANDOUT FEATURES

JW® Enhanced Italian triplex plunger pump running at 1450RPM delivers more performance and longer life.

Intelligent V-Twin EFI Honda™ iGX800 industrial series engine with **automatic RPM's** & choke sensor & electronic fuel injection with electric key start and digital engine hour meter.

Jetwave Safety System™ (JSS) thermal and safety valve to prevent overheating in excessive bypass and over pressurisation.

Vertical burner with GeniSys™ 12v Advanced Burner Control with smart sensors and protective features.

Battery isolator.

Emergency stop.

STANDARD EQUIPMENT




Industrial spray gun & single lance.



15m Double Wire Braid Hose with M24 Couplings.

DIMENSIONS (MM)

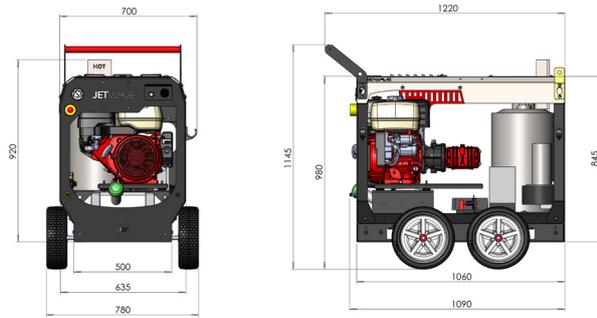

*NOTE DIMENSION IMAGE FOR DIMENSIONS ONLY

TECHNICAL DATA

EXECUTIVE G2FI 350

Product Code	HW5000-25PG2FI
Pressure / Flow Rate	5075 PSI (350 BAR) / 25 L/PM
Max Water Inlet / Outlet Temp	60°C / 90°C
Class (ASNZS: 4223)	B (8,750 Bar/Litres)
Usage Frequency	Professional - 4 Hours Daily
Nozzle Size	06
Frame Structure	CNC Modular skid galvanised steel chassis plus satin powder coat finish and stainless steel cover

MOTOR FEATURES



Engine / Power	Honda™ iGX800 Electric Key Start (air cooled w/auto speed tech) 25 HP / 800cc
Fuel Type / Capacity / Protection	Unleaded / 17L / Low Oil Shutdown

HYDRAULIC FEATURES



Pump / Head / Pistons	JW® Italian Triplex Plunger / Brass (Nickle Plated) / Ceramic
Motor Pump Coupling / Pump RPM	Gearbox Drive / 1450RPM
Unloader Valve	Independent (Zero) - Adjustable
Safety Valve	Yes
Detergent Injector	No

THERMAL FEATURES



Burner Model	Vertical 12v High Flow Series
Fuel Supply / Capacity / Consumption	Diesel / 17L / 5.74 L/PH
Coil / Housing Material	Mild steel 3mm wall seamless (400BAR rated) / Stainless Steel

DIMENSIONS & WEIGHT



Machine Dimensions / Weight	Skid: 1090mm(L) x 700mm(W) x 920mm(H) / 295KG
-----------------------------	---

WARRANTY(S)



Unit / Pump Warranty*	2 Years
Engine Warranty*	3 Years

OPTIONAL ACCESSORIES

OPTIONAL UPGRADES

30m Hose Reel (Hose Reel Bracket Required)	1060CMPL	4 Wheel Trolley Kit	JWA407A
60m Hose Reel (Hose Reel Bracket Required)	1067CMPL	On-board Water Bypass Cooling Tank	90008-12ROTOCMPL
Hose Reel Bracket	9003OHMP-G2-R1	Low Level Water Cut Out	JWA220
Additional High Pressure Hose	52001	Hose Reel Roller Guide HGS™	1067-GUIDEASSY (1067 Only)
JW Bypass Pro Foam	PROFOAM		
Turbo Head w/Lance (350BAR)	JWA159		
21" Hammerhead - Stainless Steel	JWA-FSC21-5		
30" Hammerhead - Stainless Steel	JWA-FSC30		

The manufacturer reserves the right to modify design features and technical facts without notice, due to our principals of continuous improvement.

*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).

V2.2 08/21