

HYBRID™ 130



1900
PSI


10
L/PM

ELECTRIC MOTOR
3.3KW 1 PHASE
MOTOR TYPE

DIRECT
1450RPM
DRIVE

HOT
WATER
OUTPUT

Optional - Hose Reel

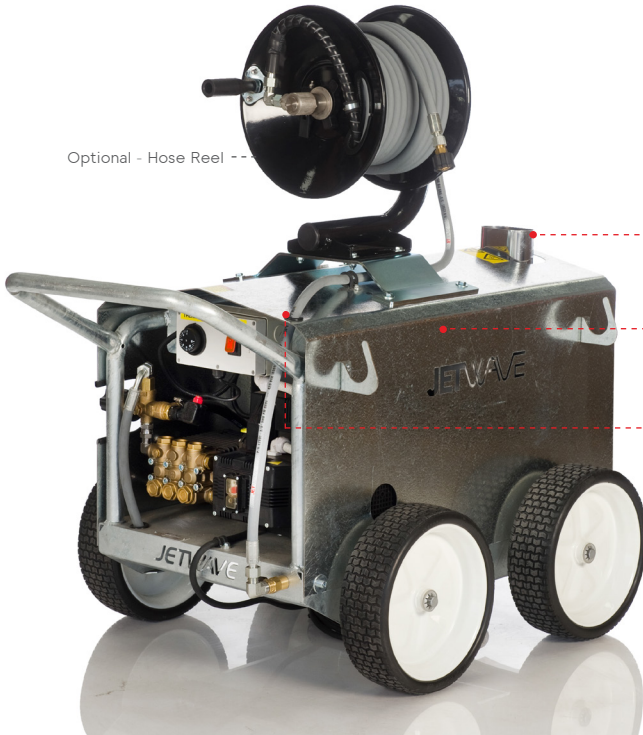

HERO INNOVATIONS



PEXO™
Galvanised Frame



JWPP™
Jetwave Italian Premium Pump





DTS™
Delayed Timer Stop



CLASS A AS/NZS 42331
PRESSURE CLEANER
NO RTO CERTIFICATION REQUIRED FOR OPERATORS

APPLICATIONS

- Food & Beverage Cleaning
- Wineries & Barrel Cleaning
- Agriculturist
- Vehicle Cleaning

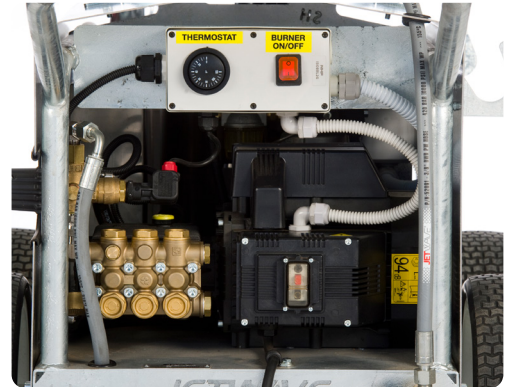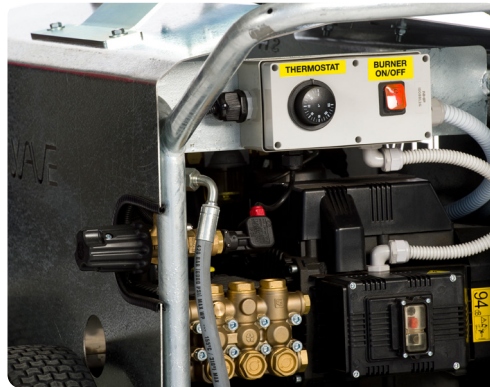

STANDOUT FEATURES



Italian triplex plunger pump running at 1450RPM delivers more performance and longer life.



Maintenance free low speed, electric motor, air cooled and protected with thermal cut-out.



Jetwave Safety System™ (JSS) thermal and safety valve to prevent overheating in excessive bypass and over pressurisation.



Brass adjustable unloader valve.



90% fuel efficient environmentally friendly V3 vertical diesel fired hot water burner system.



Brass washable inlet water filter.


STANDARD EQUIPMENT



J5000™ High Pressure Gun + Twin Lance with Nozzles.



10m Double Wire Braid Hose with M22 Couplings.

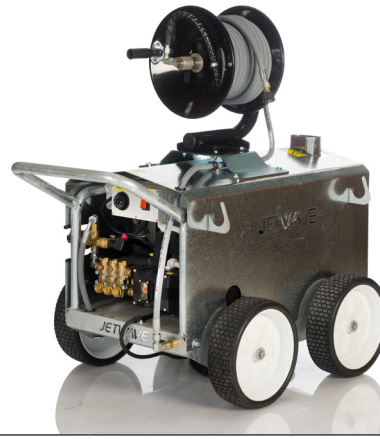

TECHNICAL DATA

HYBRID™₁₃₀

Product Code	HW130-10ELMPTST
Pressure / Flow Rate	1900 PSI (130 BAR) / 10 L/PM
Max Water Inlet / Outlet Temp	60°C / 90°C
Class (ASNZS: 4223)	A (1,300 Bar/Litres)
Usage Frequency	Industrial - 6 - 8 Hours Daily
Nozzle Size	O35
Frame Structure	Hot dipped galvanised with 4 wheel trolley kit

MOTOR FEATURES

Motor / Power	Induction / 3.3kW / 1 Phase / 230v / 50Hz
Cable Length / Control	5M / Delayed Timer Stop DTS™

HYDRAULIC FEATURES

Pump / Head / Pistons	Italian Triplex Plunger / Brass / Ceramic
Motor Pump Coupling / Pump RPM	Direct / 1450RPM
Unloader Valve	Independent - Adjustable
Safety Valve	Yes
Detergent Injector	Yes - Downstream low pressure (power boost)



THERMAL FEATURES

Burner Model	Vertical V3
Fuel Supply / Capacity / Consumption	Diesel / 12L / 5.14 L/PH
Coil / Housing Material	Mild steel 3mm wall seamless (400BAR rated) / Stainless Steel

DIMENSIONS & WEIGHT

Machine Dimensions / Weight	Skid: 920mm(L) x 600mm(W) x 730mm(H) / 95KG
-----------------------------	---

WARRANTY(S)

Unit / Pump Warranty*	 2 Years
Motor / Coil Warranty*	 2 Years

OPTIONAL ACCESSORIES

OPTIONAL UPGRADES

30m Hose Reel <small>(REQUIRES MOUNTING BRACKET)</small>	1060CMPL	Hour Meter	RQ48024VAC
60m Hose Reel <small>(REQUIRES MOUNTING BRACKET)</small>	1067CMPL	Emergency Stop	JWA218
Hose Reel Mounting Bracket	90030HRP	Forklift Pockets	90051FP
Additional High Pressure Hose	52001		
JW3 Foaming Lance w/1L Tank	JWA221		
JW Bypass Pro Foam	PROFOAM		
Turbo Head w/Lance (300BAR)	JWA160.O35		
15" Hammerhead - FSC	JWA-FSC15-CMPL		

The manufacturer reserves the right to modify design features and technical facts without notice, due to our principals of continuous improvement.
*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).

V2.2 08/21